


## Smoothing cone B15 - B20 - B26.5 and smoothing cone installation

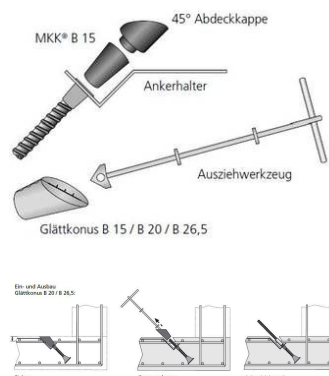

The finishing cone for the perfect concrete surface.

### Applications, features, properties and benefits

Recessed installation of the lost anchor rod

Cone can be fitted at precisely 45°

Finishes perfectly flush with the surface

Cone can be easily removed with the help of the extraction tool (for B20 und B26.5)

A connecting nut can be easily fitted once the cone has been pulled

Closing mortaring of the recess with BETOMAX® sealing mortar

MKK Cap 45° B15 for a precise 45° positioning with MKK B15

Use without additional coupling nut

Cap removal without special tool (with carpenter hammer only)

Additional compensation washer available

Article description	Title of variant	Packaging piece/ metre/ metre by the metre/ bucket/ bag/ bundle/ box/ can	Weight kg/piece
18402000	MKK® Betomax 15	25 pieces/bag	0,500
18409145	MKK® cover cap 45° B 15	20 pieces/bag	0,040
18409146	Sealing washer for MKK® skew compensation	100 pieces/bag	0,001
18581200	Anchor holder B 15	40 pieces/bag	0,500
18409140	Smoothing cone B 15 45°	1 piece	0,075
14409245	Smoothing cone B 20 45°	40 pieces/bag	0,090
14581200	Anchor holder B 20 45°	40 pieces/bag	0,500
21409245	Smoothing cone B 26.5 45°	40 pieces/bag	0,090
17581200	Anchor holder B 26.5 45°	40 pieces/bag	0,500
90414500	Extraction tool	1 piece	0,320